


# GTI MAX


THE BEST HEAVY TRAFFIC FLOORING SOLUTION

[gerflor.com](http://gerflor.com)

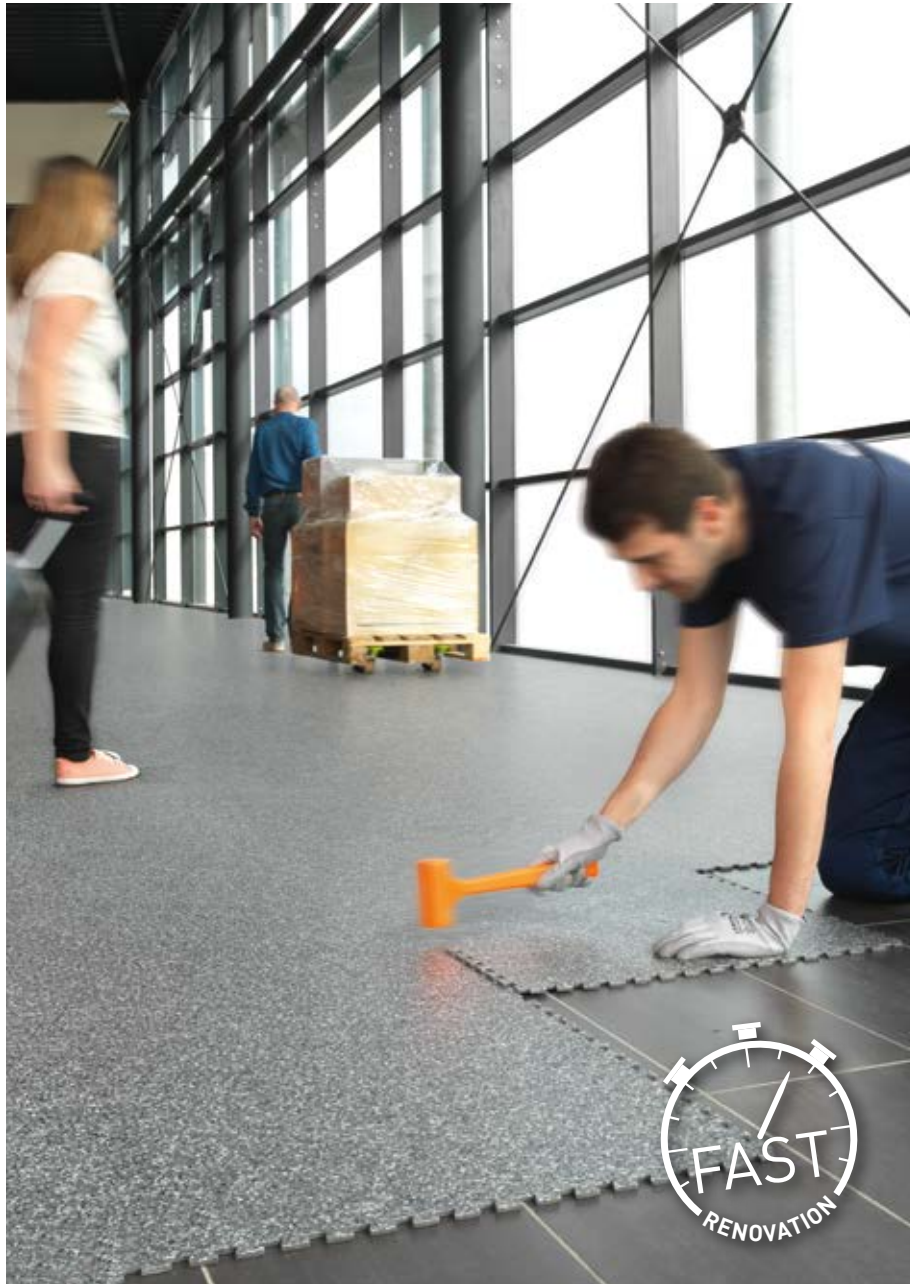

**Gerflor**<sup>®</sup>  
theflooringgroup

# REDISCOVER THE GTI MAX RANGE FOR AN EASY AND LONGLASTING RENOVATION




0266 - Peler R



0252 - Titanium R



0253 - Aluminium R



0255 - Saphir R



0253 - Aluminium



0249 - Carbon R



0247 - Magma R




0267 - Levante R



0264 - Ponente R




0265 - Maestrale R



Rice emboss



Concrete emboss



1249 - Tramontana **B**



0260 - Ora **B**



0262 - Libeccio **B**



0263 - Bora **B**



0259 - Grecale **B**



0261 - Scirocco **B**




0268 - Ermellino **B**



0236 - Black **R**



0234 - Light Grey **R**



0235 - Dark Grey **R**



0232 - Red **R**



0230 - Blue **R**





0233 - Green **R**



0231 - Yellow **R**

# RICE EMBOSSING

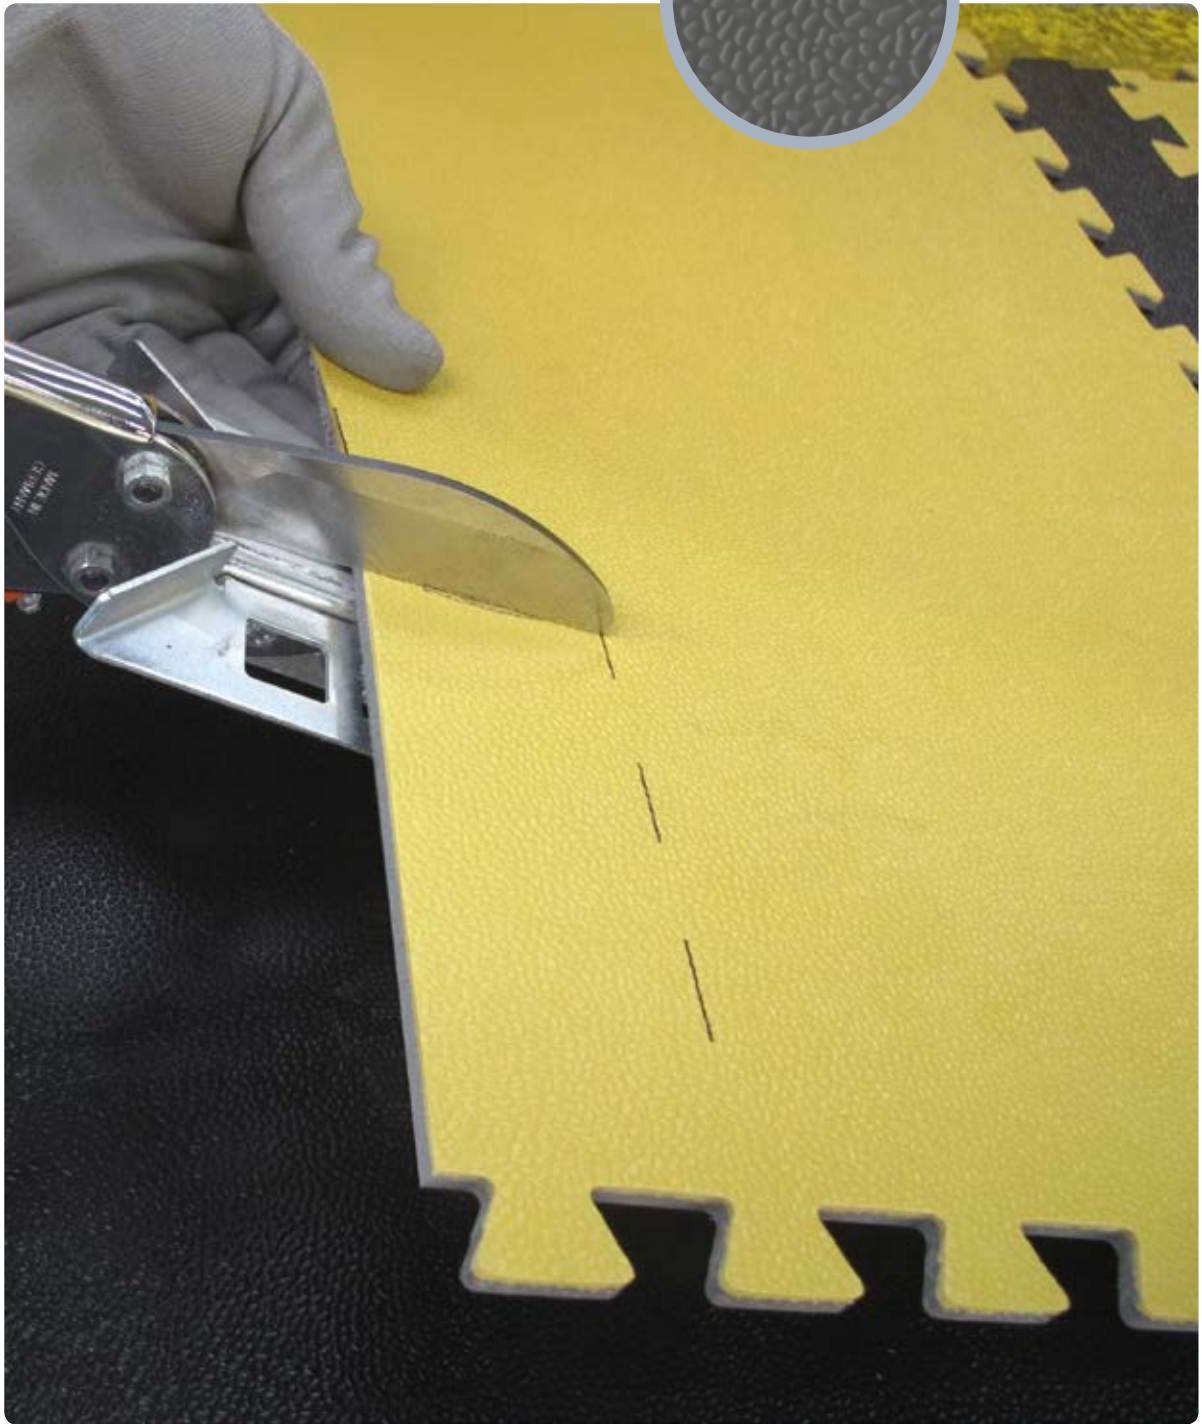

SLIP RESISTANCE **R10 RATED**

**10 YEARS** OF EXPERIENCE

**17** COLOURS

# CONCRETE EMBOSSING

NEW



SLIP RESISTANCE **R10 RATED**

**HSE 36** COMPLIANT

**7** COLOURS

# HEAVY TRAFFIC RESISTANCE!



- Dynamic Load: up to 6000 kg\*
- Static load: up to 50 kg/cm<sup>2</sup>

# INSTALLATION ON ANY TYPE OF SURFACE



TILES



CONCRETE



RESIN



WET SURFACES  
- up to 7% humidity / 92% RH



ASBESTOS SURFACES



# NO NEED TO STOP WORK




- Fast looselay installation allowing the area to remain open
- Clean installation - no adhesive or dust
- A 2 person team can install up to 200m<sup>2</sup> in 8 hours

\* Refer to installation guidelines

# GTI MAX

## HARD-WEARING



- Tiles triple pressed at over **3000 T**



- **2mm** wear layer



- PUR+ surface treatment enabling **easy maintenance**


## USER COMFORT & SAFETY



- **19 dB** less noise than tiling when users walk on it
- Underfoot comfort: **reduces fatigue**



- More slip-resistant than other types of surface (**R10 rated**)




- **4 x less hazardous** than tiling in the head impact assessment (Standard 1177: head impact - 66 cm vs. 10 cm)




## DESIGNS & LAYOUT

- Easy to install: modular tile format
- 23 colours to create zoning & corners



635 x 635 mm

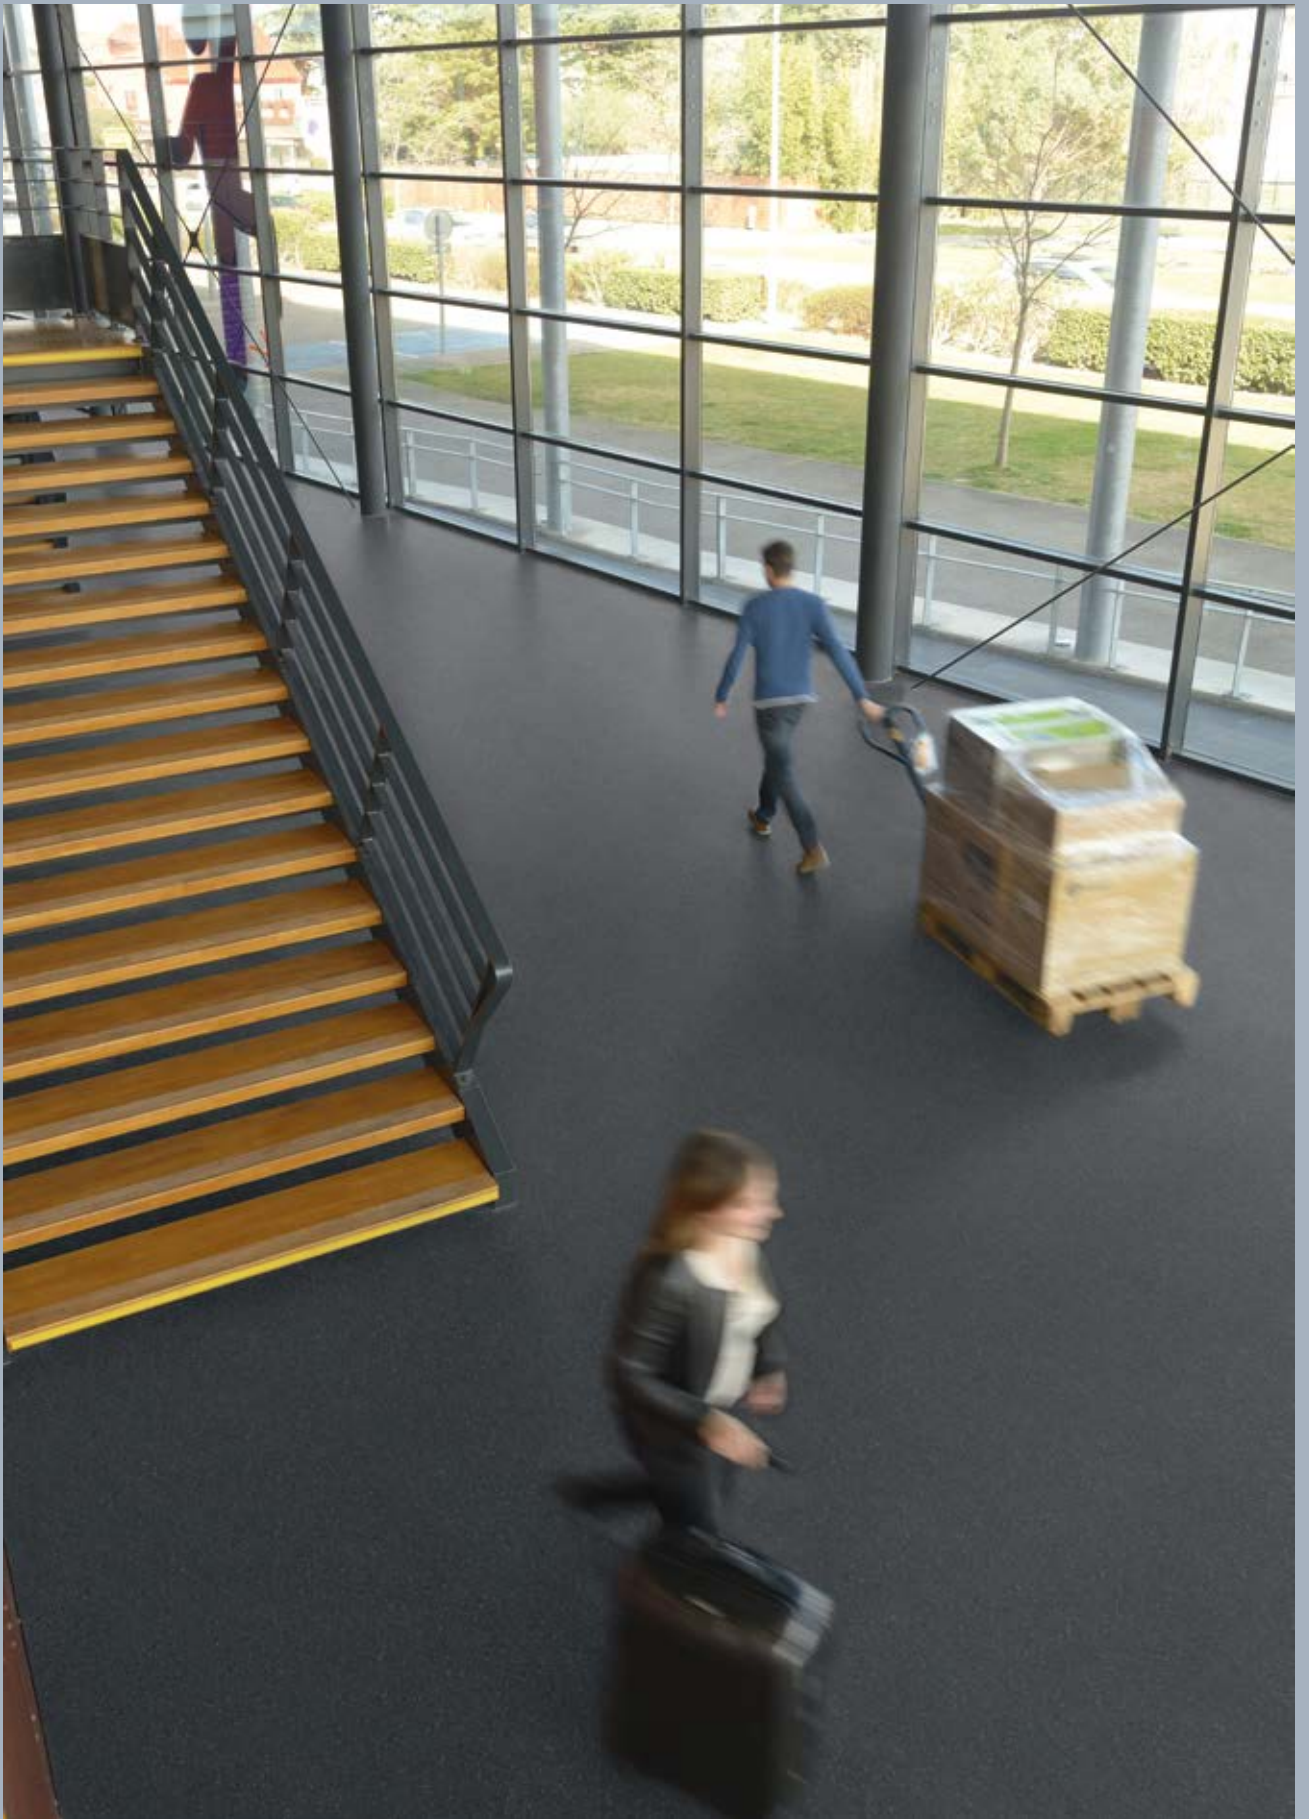

# TRIAL BY EXPERIENCE



## THE HOTEL AND HOSPITALITY SECTOR



The installation of our new flooring has breathed fresh life into this area of high pedestrian traffic. It is light and easy to maintain - we love it!

Blaine, USA - 200 m<sup>2</sup> of GTI Max



## HEALTHCARE - DRÔME HOSPITAL



We had to renew the floor coverings in the two main passageways of the hospital, without closing off access to areas that are submitted to heavy pedestrian and logistics traffic. Gerflor's GTI flooring was the natural and obvious choice.

Romans, France  
300 m<sup>2</sup> of GTI Max



## HEATHROW AIRPORT TERMINAL 3



The GTI Max tiling perfectly fulfilled all of our selection criteria:

- To keep pedestrian and machinery routes open throughout its installation
- To allow existing furniture to remain in place
- To minimise any weight addition to the airport structure

Heathrow, England  
4000 m<sup>2</sup> of GTI Max




# FULL SOLUTION

## 100% LOOSELAY **FLOORS AND FINISHES**

### FINISHING SOLUTIONS

## CORNER & ACCESS


- Corners



#### THE +

- All GTI MAX colours available

- Access (access ramp)

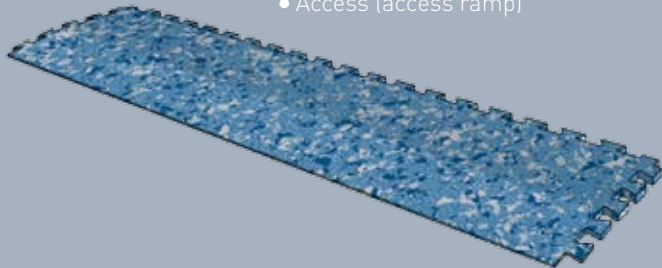


## ALUMINIUM RAMP


- Withstands intensive footfall
- Unique 100% looselay system

#### THE +

- Quick to install and can be removed without causing any damage
- Elegant and durable aluminium



0609 - Ramp



0629 - Corner

## ENTRY MAT



1719 - Romat GT

- Same thickness as GTI MAX tiles
- Full kit ready-to-lay including the mat, frame sections and fastenings
- Withstands intensive footfall

#### THE +

- Surface not damaged (no adhesives or screws)
- Full 100% looselay system (no adhesives or screws)

## TAILOR-MADE SOLUTION

### MY LOGO



- Create your logo using our water jet cutting system.
- The logo is produced using the finished product.

#### THE +

- Withstands intensive footfall without fading.


## 100% WATERPROOF SOLUTION

### GTI MAX CLEANTECH TILE

- Square with straight edges
- Heat seamable

#### THE +

- Enables a waterproof surface

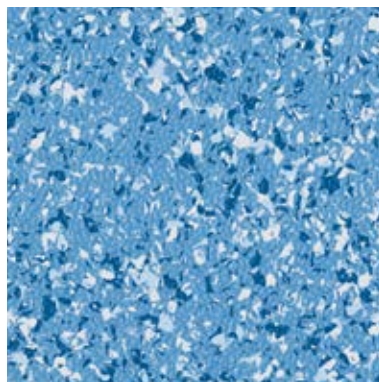

600 x 600 mm



## LESS ADHESIVE MORE RECYCLING



### COMPOSITION

- 100% REACH compliant
- FREE of formaldehyde
- FREE of heavy metals
- FREE of solvent



### RECYCLED CONTENT

- 80% recycled content
- 100% REACH compliant recycled content



### LIFE CYCLE ANALYSIS

- Eco-designed according to a product specific Life Cycle Analysis
- Product specific EPD (Environmental Products Declaration) available
- Manufactured in an ISO 14001 and ISO 50001 certified site
- Contribution to many Green Building Schemes (LEED, HQE, BREEAM...)



### RECYCLING

- 100% recyclable product



### INSTALLATION

- Adhesive free installation




### INDOOR AIR QUALITY

- TVOC emissions 10 times better than norm requirements (TVOC < 100 µg/m<sup>3</sup> after 28 days)
- Floorscore® certified
- M1 certified
- Comply with AgBB protocol
- No formaldehyde emission



# TECHNICAL DATA

## GTI MAX

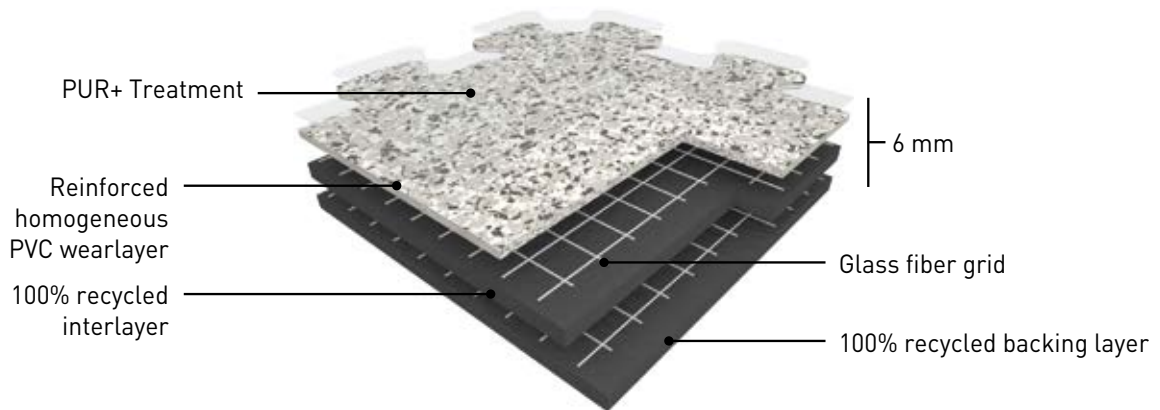

**GTI MAX CONNECT** is a multi-layered interlocking looselay vinyl tile with polyurethane treatment (PUR+), 6 mm thick with a dovetail joint, abrasion group T. It is manufactured by GERFLOR using a continuous and exclusive high pressure process.

**GTI MAX CLEANTECH** is a multi-layered looselay vinyl tile with polyurethane treatment (PUR+), 6 mm thick with welded joints, abrasion group T. It is manufactured by GERFLOR using a continuous high pressure process.

The **GTI MAX** wear layer is reinforced by specific oblong fillers that offers an outstanding resistance to traffic.

**GTI MAX** is reinforced with 2 glass fiber grids on either side of an intermediate pressed homogeneous layer. GTI's backing is a 4 mm thick black pressed homogeneous sheet, its surface is a colored and reinforced homogeneous sheet 2 mm thick.

It is made of 100% controlled recycled materials.

It is 100% recyclable and made with up to 80% recycled content.

### GTI MAX

- ▶ Resistant to heavy traffic
- ▶ Fast renovation: can be installed over existing floorcovering
- ▶ No subfloor preparation, no adhesive and no production stoppage (no loss of revenue)
- ▶ Polyurethane surface treatment PUR+ for ease of maintenance
- ▶ 6 Standard logos: Mix and match colours to create corners and walkways

## GTI MAX

CONCRETE EMBOSS

RICE EMBOSS

### DESCRIPTION

Total thickness	EN ISO 24346 (EN 428)	mm	6
Wearlayer thickness	EN ISO 24340 (EN 429)	mm	2
Weight	EN ISO 23997 (EN 430)	g/sq.m	9365
Size <b>CONNECT</b>			635 x 635
Size <b>CLEANTECH<sup>(1)</sup></b> (without dovetail)	EN ISO 24342 (EN 427)	mm	600 x 600

### CLASSIFICATION

Norm / Product specification	-	-	EN ISO 10582 (EN 649)
European classification	EN ISO 10874 (EN 685)	Class	34-43
Fire rating	EN 13 501-1	Class	B <sub>fl</sub> -s1
Static electrical propensity	EN 1815	kV	≤ 2
Slip resistance wet: ramp test with oil	DIN 51 130	Class	R10
Pendulum test	BS 7976	-	HSE 36 compliant <sup>(2)</sup> -

### PERFORMANCES

Wear resistance	EN 660.2	mm <sup>3</sup>	≤ 2
Wear group	NF 189	-	T
Type Binder content	ISO 10582	type	I
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.25
Residual indentation	EN ISO 24343-1 (EN 433)	mm	≤ 0.10
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK
Shore Hardness	EN ISO 868	Hd	≥ 55
Shifting resistance	CSTB 3562	N/mm <sup>2</sup>	≥ 30
Thermal conductivity	EN ISO 10456 (EN 12524)	W/(m.K)	0.25
Colour fastness	EN 20 105 - B02	Degree	≥ 6
Surface treatment	-	-	PUR+
Chemical products resistance	EN ISO 26987 (EN 423)	-	OK

### ENVIRONMENT / INDOOR AIR QUALITY

TVOC after 28 days	ISO 16000-6	µg / m <sup>3</sup>	<100
Certification	-	-	Floorscore®

### CE MARKING

	EN 14041	   
---	----------	---

[1] Available upon request

[2] HSE 36 compliant only for 7 references: Ermellino - Ora - Bora - Libeccio - Grecale - Scirocco - Tramontana

**Gerflor** Don't forget our complementary ranges!



Handrails



Wall Coverings  
& Protections



Entrance mats



Skirtings  
& Profiles

gerflor.com

ARCHITECTURE  
DECORATION  
SPORT  
TECHNOSPECIFIC

**ASIA:** Gerflor Asia  
Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998  
e-mail: gerflorasia@gerflor.com

**AUSTRALIA/NEW ZEALAND:** Gerflor Australasia Pty. Ltd  
Australia Tel: 1 800 060 785 - New Zealand Tel: 0 800 630 119  
e-mail: gerflor@gerflor.com.au

**AUSTRIA/SWITZERLAND:** Gerflor GmbH  
Tel: +43 (0)72 29/70 800-0 - Fax: +43 (0)72 29/70 800-218  
e-mail: austria@gerflor.com - switzerland@gerflor.com

**BELGIUM/LUXEMBURG:** Gerflor Benelux  
Tel: +32 (0)3 766 42 82 - Fax: +32 (0)3 766 29 14  
e-mail: gerflorbel@gerflor.com

**CANADA:** Gerflor International  
Tel: +1 438 333 0752 - Fax: +1 438 380 5425  
e-mail: gerflorcanada@gerflor.com

**CHINA:** Gerflor floorings (China) Co. Ltd.  
Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998  
e-mail: gerflorchina@gerflor.com

**FINLAND:** Gerflor Oy  
Tel: +358 (0) 10 6 17 5150 - Fax: +358 (0) 10 617 5152  
e-mail: info@gerflor.fi

**FRANCE:** Gerflor - Service Express:  
   
e-mail: contactfrance@gerflor.com

**GERMANY:** Gerflor Mipolam GmbH  
Tel: +49 (0)22 41-25 30-0  
e-mail: gerflormipolam@gerflor.com  
Kunden-Service  
Tel: +49 (0) 22 41-25 30-136 - Fax: +49 (0) 22 41-25 30-100  
e-mail: kundenservice@gerflor.com  
SAT Service und Anwendungstechnik  
tel: +49 (0)22 41-25 30 555 - Fax: +49 (0)22 41-25 30 550  
e-mail: technik@gerflor.com

**IRELAND:** Gerflor Ltd  
Tel: +353 (0) 42 966 1431 - Fax: +353 (0) 42 966 1759  
e-mail: gerflorirl@gerflor.com

**ITALY:** Gerflor S.p.A.  
Tel: +39 02 90 40 10 - Fax: +39 02 90 42 74 84  
e-mail: gerfloritalia@gerflor.com

**LATIN AMERICA (Brazil):** Gerflor América Latina  
Tel: +55 11 38 48 20 20  
e-mail: gerflor@gerflor.com.br

**MIDDLE EAST:** Gerflor Middle East  
Tel: +966 13 847 1779 - Fax: +966 13 847 1781  
e-mail: info@gerflorme.com

**NETHERLANDS:** Gerflor Benelux  
Tel: +31 (0)40 266 17 00 - Fax: +31 (0)40 257 46 89  
e-mail: gerflornl@gerflor.com

**OTHER COUNTRIES:** Gerflor International  
Tel: +33 (0)4 74 05 40 00 - Fax: +33 (0)4 74 05 03 13  
e-mail: gerflorcontract@gerflor.com

**POLAND:** Gerflor Polska Sp z o.o  
Tel: + 48 61 823 34 01 - Fax: + 48 61 823 34 33  
e-mail: info@gerflor.pl

**PORTUGAL:** Gerflor Iberia, SA  
Tel: +351 21 843 95 49 - Fax: +351 21 846 55 44  
e-mail: gerflorportugal@gerflor.com

**RUSSIA:** Gerflor zao  
Tel./Fax: + 7 495 785 23 71  
e-mail: gerflorussia@gerflor.ru

**SCANDINAVIA:** Gerflor Scandinavia a.s.  
Tel: + 47 64 95 60 70 - Fax: + 47 64 95 60 80  
e-mail: gerflorscand@gerflor.no

**SPAIN:** Gerflor Iberia, SA  
Tel: +34 91 653 50 11 - Fax: +34 91 653 25 85  
e-mail: gerfloriberia@gerflor.com

**UNITED KINGDOM:** Gerflor Ltd  
Sample service: Contractuk@gerflor.com  
Office Tel: + 44 (0) 1926 622 600 - Fax: + 44 (0) 1926 401 647

**USA:** Gerflor North America  
Tel: 877 GERFLOR (437 3567) - Fax: 847 394 3753  
e-mail: info@gerflorusa.com

RC Lyon B 726-580 152 - JPE - Printed in CEE 209 406 - 06/2017 - 2004 4881 - Documentation indicative price: 2€

**Gerflor**







Be connected!



www.gerflor.com

#Gerflor

GTI MAX: LESS ADHESIVE, MORE RECYCLING

 <b>REACH</b>					
<b>COMPOSITION</b> 100% REACH	<b>INSTALLATION</b> Adhesive free Installation	<b>INDOOR AIR QUALITY</b> TVOC emissions 10 times better than norms requirements (TVOC <100 µg/m³ after 28 days)	<b>RECYCLED CONTENT</b> 80%	<b>RECYCLABILITY</b> 100% recyclable product	<b>LCA</b> Eco-designed according to a product specific Life Cycle Analysis

**Gerflor**  
theflooringroup