



SCHATEX CREATILE

The creative carpet tile

The carpet tiles from the SCHATEX Creatile collection stand for a particularly exceptional feeling of space. Unique colour effects, achieved through the contrasting of black and colourful yarns, are the basis for the trendy pixel-retro designs. SCHATEX Creatile lends your rooms a level of authenticity and originality. The very smooth surface structure is above all robust and makes this tile collection into a modular all-rounder, which is perfectly suited for the commercial but also the residential setting. The two-coloured dense loops are up to 100% environmentally friendly and recyclable Aquafil Econyl-yarns. SCHATEX Creatile carpet tiles are for this reason the ecologically friendly solution for a creative spatial experience.

- Dense loops in two colours
 - Trendy pixel-retro design
 - Composed 100% of environmentally friendly Aquafil Econyl yarns
 - Suitable for high footfall areas with a high level of public traffic (Use Area Class 33)
 - Very smooth surface structure
 - Very high pile tuft count (252.800 / m²)
 - Flame resistant B₁-S1 (EN ISO 9239-1)
 - Robust backing made from Fibreglass
 - Measurements: 50 x 50 cm
 - Total weight: 4500 g/m²
 - Gauge: 1/10"
-

SPECIFICATION




Specification SCHATEX Creatile

Construction		Pixel-Loop
Yarn		100% Polyamide
Yarn Weight		700 g/m ² ± 5%
Pile Thickness	ISO 1766	3.0 mm ± 5%
Tuft Density	ISO 1763	± 252800/m ²
Backing		Reinforced Fibreglass Backing
Total Thickness	ISO 1765	5.5 mm ± 5%
Total Weight		4500 g/m ² ± 7.5%
Dimension		50 x 50 cm
Tiles per Box		20

Performance

Classification		33 (Commercial - heavy use)
Castor Chair Test	EN 985	pass
Slip Resistance		class DS
Vettermann Test	ISO TR 10361 / EN 1471	pass
Thermal Insulation	ISO 8302	0.07 m ² K/W
Dimensional Stability	EN 986	pass
Underfloor Heating		qualified
Electrical Resistance	ISO 6356	antistatic
Fire Resistance	EN ISO 11925-2 / EN ISO 9239-1	B _{fl} - s1 (hardly inflammable)
Colour Fastness	ISO 105 B02	6-7

Specifications

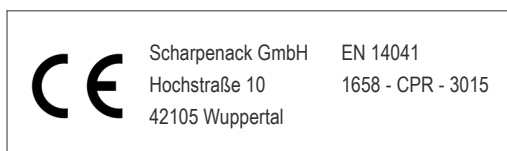

Colours

Dark Blue 1425	Dark Grey 1420	Light Grey 1416	Light Brown 1406
Orange 1433	Blue 1422	Dark Brown 1407	Red 1428

Preliminary Specification

Best results are obtained when cleaned with a dry shampoo method.

→ **see Care Sheet**

Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30m² it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

→ **see Installation Instruction**

Specifications are subject to normal manufacturing tolerances and may be changed without prior notice.