



SCHATEX EFFECTS

A New Standard Of Living

The carpet tiles of the SCHATEX Effects Collection really do their name justice. The multi-coloured loop pile tiles are distinguished through the design featuring stripes which are punctuated by bold colours, the result produces a fresh, sensational ambience in your room. In terms of colour the six examples in the collection are available in greys, browns, blacks and blues. The textile floor tiles are hardwearing and resilient, on the one hand due to the quality pile material made from a mixture of two types of polyamide (Solution Dyed and Solution Dyed Space) and on the other because of the reinforced backing structure. These self-lay tiles can be installed without a problem in heavy traffic domestic and commercial rooms (Use Area Class 33 according to EN 1307). In addition the tiles are extremely flame resistant (B₁-s1 under EN 14041), are anti-slip (EN 14041) and can deal with the regular use of castor wheels (EN 985). SCHATEX Effects – refined design and exceptionally hardwearing.

- Loop pile in a multi-coloured striped design
 - Above all robust (Use Area Class 33, EN 1307)
 - Suitable for castor wheels (under EN 985)
 - Top quality polyamide pile material
-

SPECIFICATION




Specification SCHATEX Effects

Construction		Stripe-Loop
Yarn		50% Polyamide Solution dyed + 50% Polyamide Solution dyed space
Yarn Weight	ISO 8543	580 g/m ² ± 5%
Pile Thickness	ISO 1766	2.5 mm ± 5%
Tuft Density	ISO 1763	± 168000/m ²
Backing		Reinforced Fibreglass Backing
Total Thickness	ISO 1765	5.7 mm ± 5%
Total Weight	ISO 1763	4500 g/m ² ± 7.5%
Dimension		50 x 50 cm
Tiles per Box		20

Performance

Classification		33 (Commercial - heavy use)
Castor Chair Test	EN 985	A: continuous use
Slip Resistance		class DS
Vettermann Test	ISO TR 10361 / EN 1471	pass
Thermal Insulation	ISO 8302	0.05 m ² K/W
Dimensional Stability	EN 2551	pass
Underfloor Heating		qualified
Electrical Resistance	ISO 6356	antistatic
Fire Resistance	EN ISO 11925-2 / EN ISO 9239-1	B _{fl} - s1 (schwer entflammbar)
Colour Fastness	ISO 105 B02	> 5

Specifications

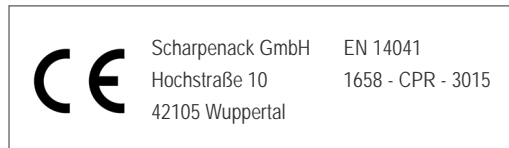

Colours

Black 2520	Blue 2521
Dark Grey 2519	Dark Brown 2508
Light Grey 2517	Light Brown 2506

Preliminary Specification

Best results are obtained when cleaned with a dry shampoo method.

→ **see Care Sheet**

Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30m² it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

→ **see Installation Instruction**

Specifications are subject to normal manufacturing tolerances and may be changed without prior notice.