



---

## SCHATEX SMARTLINE PLUS

### A Hard Wearing, Stylish Carpet Tile

The SCHATEX Smartline Plus Collection gathers together top quality carpet tiles with a rib cord structure. The colour palette of the collection ranges from a striking black, via fancy chocolate tones, to bright blue and elegant red. With the exception of the black tile, all others have a mottled colouring effect, which makes light stains almost invisible and reduces the effort required to care for and clean this floor to a minimum, perfect for a busy daily life. Through the directed rib cord structure of the carpet tiles, their full creative potential is realised by laying them in a chess-board pattern, lending your room a modern atmosphere. Put together a playful floor yourself, by using various tiles and different colour combinations to create a floor which is completely individual and unique. SCHATEX Smartline Plus also convinces from a technical point of view: thanks to the high-grade polypropylene yarn materials and the backing surface, equipped with a reinforced layer, these tiles can be installed in even the most heavy traffic commercial areas (Use Area Class 33 according to EN 1307). The suitability for use with castor wheels and under-floor heating systems guarantees flexibility. In addition, these carpet tiles offer anti-static properties and anti-slip characteristics. SCHATEX Smartline Plus – the robust designer tile.

- Rugged rib cord structure
  - Modern and classical colours available
  - Suitable for use with castor wheels (according to EN 985)
  - Very flame resistant (C<sub>s</sub>-s1 according to EN ISO 9239-1)
  - Child's play to lay (self-laying, no adhesive required)
  - Extremely hardwearing (Class 33 under EN 1307)
-

# SPECIFICATION




## Specification SCHATEX Smartline Plus

<b>Construction</b>		Ribbed Coarse Weave
<b>Yarn</b>		100% Polypropylene
<b>Yarn Weight</b>	ISO 8543	775 g/m <sup>2</sup> ± 5%
<b>Pile Thickness</b>	ISO 1766	3 mm ± 5%
<b>Backing</b>		Reinforced Fibreglass Backing
<b>Total Thickness</b>	ISO 1765	7 mm ± 5%
<b>Total Weight</b>	ISO 1763	3800 g/m <sup>2</sup> ± 5%
<b>Dimension</b>		50 x 50 cm
<b>Tiles per Box</b>		20

## Performance

<b>Classification</b>	EN 1307	33 (Contract – heavy use)
<b>Castor Chair Test</b>	EN 985	A: continuous use
<b>Slip Resistance</b>		class DS
<b>Vettermann Test</b>	ISO TR 10361 / EN 1471	pass
<b>Thermal Insulation</b>	ISO 8302	0.08 m <sup>2</sup> K/W
<b>Dimensional Stability</b>	EN 986	pass
<b>Underfloor Heating</b>		qualified
<b>Electrical Resistance</b>	ISO 6356	antistatic
<b>Fire Resistance</b>	EN ISO 11925-2 / EN ISO 9239-1	C <sub>fl</sub> – s1 (hardly inflammable)
<b>Colour Fastness</b>	ISO 105 B02	7-8

## Specifications

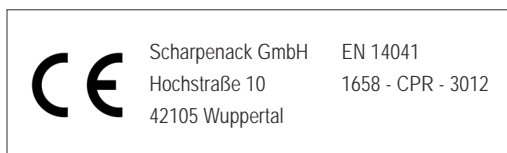

## Colours

<b>Anthracite</b> 2011	<b>Black</b> 2015	<b>Mid Blue</b> 2021
<b>Dark Grey</b> 2019	<b>Brown</b> 2008	<b>Beige</b> 2001
<b>Grey</b> 2016	<b>Red</b> 2029	<b>Blue</b> 2023

## Preliminary Specification

Best results are obtained when cleaned with a dry shampoo method.

→ see Care Sheet

Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30m<sup>2</sup> it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

→ see Installation Instruction

Specifications are subject to normal manufacturing tolerances and may be changed without prior notice.