



---

## SCHATEX SPACE

### A Stylish and Contemporary All-Rounder

In the SCHATEX Space Collection seven top quality carpet tiles are to be found, which really stand out thanks to the modern, linear forms and two-toned colour patterns. Contrast rich combinations of red and black are available exist like colours which merge into each other (i.e. shades of grey). The irregularly intermittent, incorporated stripes inspire a feeling of exciting dynamism. Alongside the pioneering, futuristic look are to be found contemporary technical qualities. The self-lay tiles come equipped with a reinforced backing, which makes installing them by hand even easier and simultaneously makes the tiles even more hardwearing and robust. The range of properties where these tiles can be laid is extremely broad, from heavy traffic domestic areas to normal usage in the commercial room, the SCHATEX tiles remain steadfast. Naturally the tightly woven loop pile modules are suitable for use with castor wheels (according to EN 985). The technical picture is completed by the DS Anti-slip (EN 14041) and the anti-static characteristic (under EN 14041). Invigorate your room with SCHATEX Space – the stylish and trendy all-rounder.

- Two colour mottled stripe appearance
  - Suitable for castor wheels (according to EN 985)
  - 100% polypropylene
  - Suited to the domestic and commercial room (Use Area Class 32 under EN 1307)
  - Top quality backing structure with a reinforced layer
-

# SPECIFICATION




## Specification SCHATEX Space

<b>Construction</b>		Stripped-Loop
<b>Yarn</b>		100% Polypropylene
<b>Yarn Weight</b>	ISO 8543	540 g/m <sup>2</sup> ± 5%
<b>Pile Thickness</b>	ISO 1766	2.6 mm ± 5%
<b>Tuft Density</b>	ISO 1763	± 162400/m <sup>2</sup>
<b>Backing</b>		Reinforced Fibreglass Backing
<b>Total Thickness</b>	ISO 1765	6 mm ± 5%
<b>Total Weight</b>		4000 g/m <sup>2</sup> ± 7.5%
<b>Dimension</b>		50 x 50 cm
<b>Tiles per Box</b>		20

## Performance

<b>Classification</b>	EN 1307	32 (Contract – general use)
<b>Castor Chair Test</b>	EN 985	A: continuous use
<b>Slip Resistance</b>		class DS
<b>Vettermann Test</b>	ISO TR 10361 / EN 1471	pass
<b>Thermal Insulation</b>	ISO 8302	0.05 m <sup>2</sup> K/W
<b>Dimensional Stability</b>	EN 986	pass
<b>Underfloor Heating</b>		qualified
<b>Electrical Resistance</b>	ISO 6356	antistatic
<b>Fire Resistance</b>	EN ISO 11925-2 / EN ISO 9239-1	C <sub>fl</sub> – s1 (hardly inflammable)
<b>Colour Fastness</b>	ISO 105 B02	> 5

## Specifications

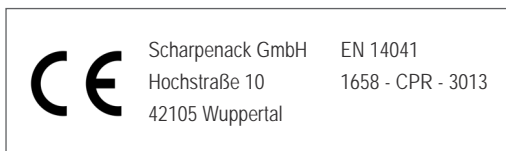

## Colours

<b>Black</b> 2415	<b>Grey</b> 2417	<b>Light Red</b> 2426
	<b>Blue</b> 2423	<b>Dark Brown</b> 2409
	<b>Dark Red</b> 2427	<b>Light Brown</b> 2406

## Preliminary Specification

Best results are obtained when cleaned with a dry shampoo method.

→ **see Care Sheet**

Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30m<sup>2</sup> it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

→ **see Installation Instruction**

Specifications are subject to normal manufacturing tolerances and may be changed without prior notice.