



SCHATEX TRAFFIC PLUS

The all-rounder carpet for commercial use

The carpet tiles of the SCHATEX Traffic Plus Collection are perfectly suited to the most demanding of commercial settings. An extremely high level of workmanship went into making these needle-velour tiles. In production hardwearing fibres made from 100% Polypropylene were used. The innovative reinforced fibreglass backing ensures dimensional stability and a very easy installation process, without the need for adhesives. SCHATEX Traffic Plus carpet tiles are, due to their high level of robustness, ideal for use in a business scenario for example in open-plan offices, commercial and catering premises (Use Area Classification 33). The six modern colours, with a lightly mottled effect, which seem to shimmer under the fall of the light, make for a comfortable and pleasant atmosphere in your room.

- Wear resistant needle-felt tiles
 - Modern colours with a soft, gleaming effect
 - Ideally suited for commercial settings (Use Area Class 33 according to EN 1307)
 - Anti-static qualities
 - Innovative reinforced fibreglass backing
 - Flame retardant (C_F-S1 according to EN ISO 9239-1)
 - Suitable for use with castor wheels (EN 985)
 - Can be laid over under floor heating
 - Pile fibre material: 100% Polypropylene
 - Measurement: 50 x 50 cm
 - Total thickness: 8.44 mm (ISO 1765)
-

SPECIFICATION




Specification SCHATEX Traffic Plus

Construction		Needle Velour
Yarn		100% Polypropylene
Yarn Weight		800 g/m ² ± 5%
Pile Thickness	ISO 1766	5.7 mm ± 5%
Backing		Reinforced Fibreglass Backing
Total Thickness	ISO 1765	8.4 mm ± 5%
Total Weight		3920 g/m ² ± 7.5%
Dimension		50 x 50 cm
Tiles per Box		20

Performance

Classification	EN 1307	33 (Contract – heavy use)
Castor Chair Test	EN 985	A: continuous use
Slip Resistance		class DS
Vettermann Test	ISO TR 10361 / EN 1471	pass
Thermal Insulation	ISO 8302	0.08 m ² K/W
Dimensional Stability	EN 986	pass
Underfloor Heating		qualified
Electrical Resistance	ISO 6356	antistatic
Fire Resistance	EN ISO 11925-2 / EN ISO 9239-1	C _{fl} – s1 (hardly inflammable)
Colour Fastness	ISO 105 B02	7-8

Specifications

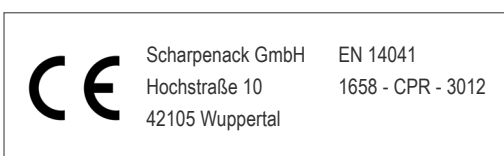

Colours

Anthracite 1814	Black 1808
Blue 1823	Marine 1824
Grey 1816	Red 1829

Preliminary Specification

Best results are obtained when cleaned with a dry shampoo method.

→ **see Care Sheet**

Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30m² it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

→ **see Installation Instruction**

Specifications are subject to normal manufacturing tolerances and may be changed without prior notice.