



SCHATEX VISION STRIPES

A Reputable Carpet Tile with a Modern Look

The many different colours of the SCHATEX Vision range come together in the SCHATEX Vision Stripes Collection. The parallel arranged stripes in contrasting colours accentuate your floor whether similar in colour, very different, or used in conjunction with SCHATEX Vision, and enable a creative, dynamic and modern floor design. Various shades of grey act as primary colour. These loop pile carpet tiles all come in a mottled look, which makes them particularly suited for everyday life, light stains and scuffs are rendered almost invisible. Top quality yarn, made from 100% polyamide, is the bedrock of the SCHATEX tiles. Firstly the polyamide fibres make for a subtle, elegant gloss effect, which in the blue tile lends luxurious charm, in the black urban professionalism, in all tiles it leads to an extremely hardwearing product which is also capable of being used in heavy traffic commercial areas (Use Area Class 33 according to EN 1307). The appearance of these tiles is not the only hint at luxury, the integrated sound absorption ((24 dB, according to ISO 140-8) creates an upscale living comfort. The top quality backing with a reinforced layer, created using the very latest of technical knowledge, improves the dimensional stability of these self-laying carpet tiles and simplifies the laying process no end. With the limitless suitability to be used with castor wheels (EN 985), the DS Anti-slip properties and the fire resistance B_f-s1 (according to EN ISO 109239-1)

- Extremely hardwearing loop pile carpet tiles (Use Area Class 33 according to EN 1307)
 - Striped structure in a mottled finish
 - Works very well in combination with SCHATEX Vision
 - Suitable for castor wheels (according to EN 985)
 - Can be laid over under-floor heating systems
 - Very flame resistant B_f-s1 (according to EN ISO 9239-1)
 - Particularly good sound absorption (24 dB)
-

SPECIFICATION




Specification SCHATEX Vision Stripes

Construction		Stripped-Loop
Yarn		100% Polyamide
Yarn Weight		550 g/m ² ± 5%
Pile Thickness	ISO 1766	3.5 mm ± 5%
Tuft Density	ISO 1763	± 164000/m ²
Backing		Reinforced Fibreglass Backing
Total Thickness	ISO 1765	6.5 mm ± 5%
Total Weight		4585 g/m ² ± 7.5%
Dimension		50 x 50 cm
Tiles per Box		20

Performance

Classification		33 (Contract – heavy use)
Castor Chair Test	EN 985	A: continuous use
Slip Resistance		class DS
Vettermann Test	ISO TR 10361 / EN 1471	pass
Thermal Insulation	ISO 8302	0.08 m ² K/W
Dimensional Stability	EN 986	pass
Underfloor Heating		qualified
Luxery/Comfort	EN 1307	classe 1
Sound Absorption	ISO 140-8	24 dB
Electrical Resistance	ISO 6356	antistatic
Fire Resistance	EN ISO 11925-2 / EN ISO 9239-1	B _{fl} - s1 (hardly inflammable)
Colour Fastness	ISO 105 B02	> 5

Specifications

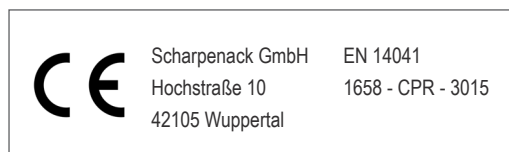

Colours

Black 1614	Light Grey 1617
Dark Grey 1613	Blue 1625

Preliminary Specification

Best results are obtained when cleaned with a dry shampoo method.

→ **see Care Sheet**

Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30m² it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

→ **see Installation Instruction**